


Bark Hogs



Fulghum Industries bark hog is the last word for wood waste recovery in woodyards, chip mills and pulp mills. This is our latest solution to the economical processing of scraps and bark for wood fired boilers -- yours and your customer's.

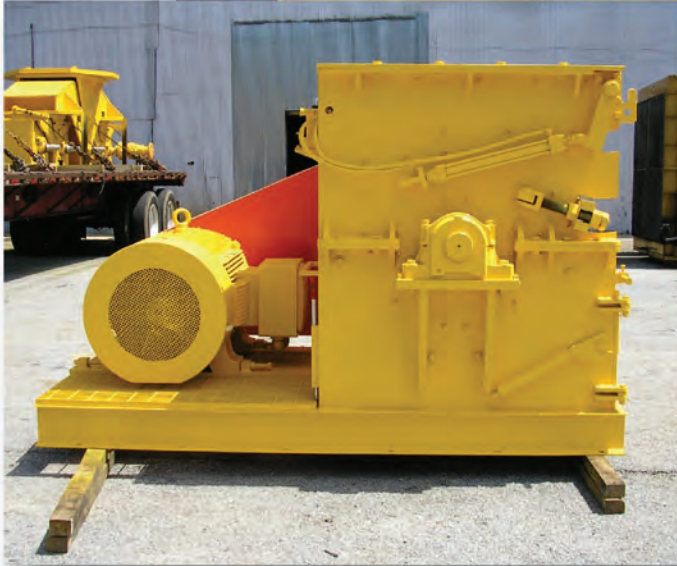

www.fulghum.com

Fulghum 48" Heavy Duty X-Rotor Hog

Infeed opening:	36" x 48"
Outfeed opening:	48" x 54"
Shaft size:	4 - 15/16"
Bearing size:	4 - 15/16"
Shear arms:	3" thick x 6" wide
Number of shear arms:	12
Shear arms:	Have replaceable tips (24)
Frame housing:	1" thick plate with 1/2" AR side liners
Door assembly:	1 -1/2" thick with 1/2" thick wear liner with hardsurfaced breakers made of 1-1/2" plate. Hydraulic and pump to open door.
Grate:	Grate made from 1" x 2" flat bar supported by 3/4" plate
Recommended Drive:	250 HP, 1800 RPM, TEFC motor with V-belt drive and expanded metal belt guard



Fulghum 60" Heavy Duty X-Rotor Hog

Infeed opening:	30" x 60"
Outfeed opening:	60" x 66"
Shear arms:	4" thick x 6" wide
Number of shear arms:	20
Shear arms:	Have replaceable tips (40)
Frame housing:	1" thick plate with 1/2" AR side liners
Door assembly:	1 -1/2" thick with 1/2" thick wear liner with hardsurfaced breakers made of 1-1/2" plate. Hydraulic cylinder and pump to open door.
Grate (screen):	Grate made from 1" x 2" flat bar supported by 3/4" plate
Recommended Drive:	300 HP, 1800 RPM, TEFC motor with 8V configuration V-belt drive and expanded metal belt guard



fulghum industries, inc.

317 S. Main Street, Wadley, Georgia 30477 / (478) 252-5223



www.fulghum.com