


Drum Debarkers




Here's the inside story on the unbeatable ones - Fulghum's heavyweight drum debarkers. With their solid steel shells (up to one and a quarter inches thick) and rubber tired drives, these tough finishers are customized to your woodyard system for either treelength stems, shortwood or both. Diameters are 9, 11, 12 and 14 feet. Debarker lengths range from 30 to 120 feet. And remember, they're from Fulghum - the measure of quality.



www.fulghum.com

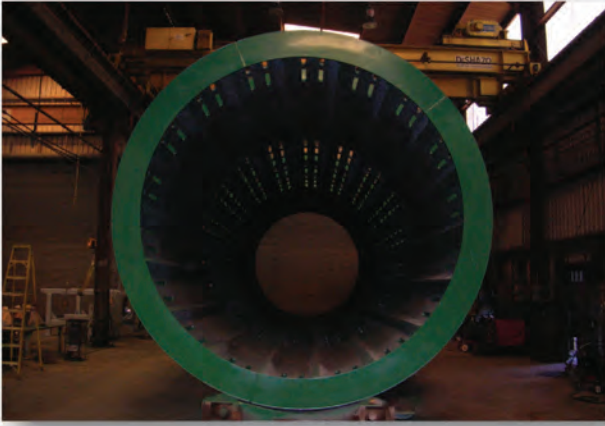

Drum debarkers fabricated in Fulghum's plant.

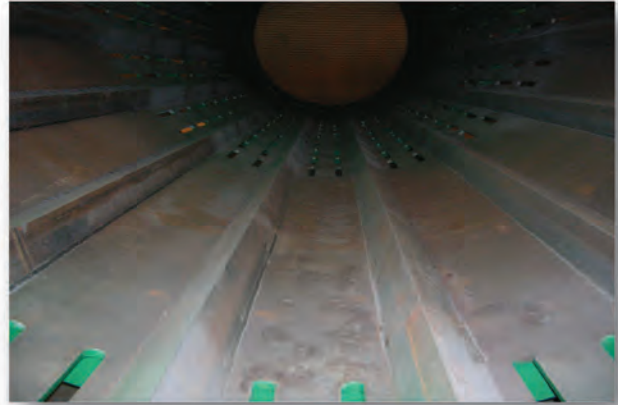

Lifters for this rugged equipment are installed with submerged arc welds to provide shell uniformity. They are also reverse steel angled.



Drum shell is driven by rubber tires.

Drum Debarker Data

Specifications are for 9, 11, 12 and 14 ft. diameter drums.

Tubular frames: Rectangular steel tubing for all debarkers.

Stiffening members: 1" plate rings.

Bark chutes: 3/8" plate with rectangular steel tubing frame for all debarkers.

Slot Openings: 2" x 18"

Shell thickness: 9, 11, 12 all have 1" thick shell. 14 has 1 1/4" thick shell.

RPM: 9±

Support Frames: 9, 11, 12 by steel, 14 by concrete.

Specifications may change without notice.

fulghum industries, inc.

317 S. Main Street, Wadley, Georgia 30477 / (478) 252-5223



www.fulghum.com